D570 ARTICULATED DUMPER

D'AVINO



- 180°SWIVEL ABRASION RESISTANT BODY
- ENHANCED STABILITY
- 4WD HYDROSTATIC TRANSMISSION
- FOLDABLE ROPS STRUCTURE
- COMPACT SIZE
- HIGH QUALITY COMPONENTS
- ROBUST AND RELIABLE









PERFORMANCE		
MODEL	D\$70	
Maximum Load Capacity	7000 Kg	
SAE Heaped Capacity	3600 L	
Struck Capacity	2800 L	
Unladen Weight	3500 Kg	
MAX Driving Speed	30 Km/h	
MAX Gradeability with Full load	35%	

MAX Gradeability with Full load



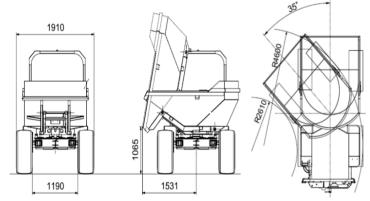

STANDARD SPECIFICATIONS:		
ENGINE		
Model	Yanmar Diesel Tier IIIA	
Engine Power	(52,1 Kw/70,7 Hp)	
TRANSMISSION		
Type/Model	Automotive Hydrostatic Transmission	
Axles	Planetary reduction on differential output	
Articulation/Swing	± 31° / ±15°	
Gears	2 Forward and 2 Reverse	
BRAKES		
Service and Parking Brakes	Oil-Immersed Multi-discs Hydraulically Operated	
TYRES		
Standard Tyres	12.5/80-18″	
DRIVING PLATFORM		
Grammer Deluxe seat Std		Std
Foldable ROPS Protection	otection frame Std	
HYDRAULIC SYSTEM		
Double Hydraulic Gear Pump		14/16 cm3
BODY		
Certified HARDOX 450 Abrasion Resistant Body Structure		Std
180° Swivel body, unloading on 3 sides Std		Std
MISCELLANEOUS		
Fuel tank capacity		78 L
Hydraulic tank capacity		90 L
Electrical system voltage		12v
AVAILABLE OPTIONS		
Yanmar TierV engine		Optional
Front View Camera Syste	m	Optional
LED Work lights Kit		Optional
Canopy		Optional











Nimac Pacific reserves the right to modify and update the contents of this at any time. Information and technical data are as available at time of printing.